




BSR5150 | BSR5300



BSR6300 | BSR6500

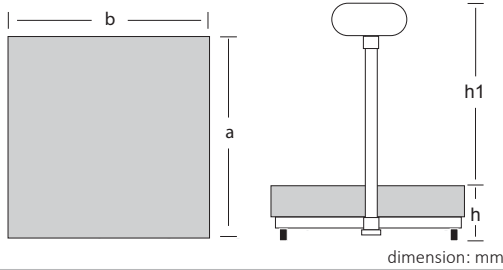

Models	a	b	h	h1
BSR5	600	500	130	620
BSR6	800	600	150	690
BSR6*P	800	600	250	1020

Power
100-240V - 10V Adaptor
Direct AC optional
Battery: 6V3.2Ah
Battery Life: 120 hours

Display Resolution
1/3,000 - 1/15,000

Platform Sizes
500*600mm | 600*800mm

Capacity
150-600Kg

Load Cells
M17 - IP65
M19 - IP65 - BSR600P

Display
LED - 25mm
LCD - 31mm

Indicator Approval
CE

Units
Kg/lb/g/oz, etc.


Serial Output
RS232 (optional)

Operating Temperature
-10°C - 40°C

Storage Temperature
-25°C - 55°C



BSR6300P | BSR6600P

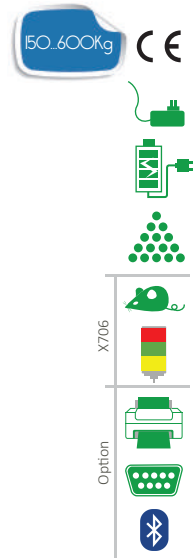

Heavy Duty Platform

Steel tube welded platform
Stainless steel cover
Capacity up to 600Kg
Plastic powder coated finish
Overloading protecting
BSR6300/6500 with cast iron wheels
other models with universal wheels
BSR* with protecting rail
BSR*P without protecting rail

Load Cell

Aluminum alloy material, IP65

X704 X706 Indicator

ABS housing
Indicator neck adjustable
BSR5* & BSR6300 | BSR6500 - X704
BSR6300P | BSR6600P - X706
Counting function
Checkweigh function
Speed adjustable
Auto power saving
Hold (animal weighing) function
Multi-units exchange
Zero range programmable
G value (gravity) adjusting
Optional RS232 interface
Optional Bluetooth output

Options

Isolated RS232 interface
Bluetooth output

Models

Part No.	100197	100198	100199	100200	100201	100202
Models	BSR5150	BSR5300	BSR6300	BSR6500	BSR6300P	BSR6600P
U.P.(USD)	\$500.00	\$500.00	\$540.00	\$540.00	\$720.00	\$840.00
Capacity	150kg	300kg	300kg	500kg	300kg	600kg
Division	20g	50g	50g	100g	50g	100g
Size	500 x 600mm		600 x 800mm			
Weight	30kg		38kg		46kg	