

SUS304 | SUS316

### Platform washdown

SUS304 stainless steel rugged structure

Low profile of double deck design

- SUS316 stainless steel optional

Two heavy duty stainless steel hydraulic bars

3 different platform sizes for selection

- customized platform available

Capacity up to 2000kg

Polish finish


M28s | BM8D

### LoadCell

Standard s.s M28s load cell - Models1

OIML/NTEP approved s.s BM8D load cell - Models2

17-4Ph material, IP68 protection

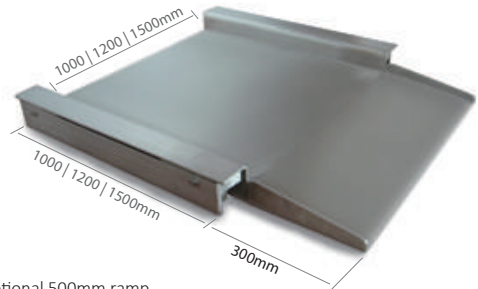

- optional 500mm ramp

### Optional K7s Indicator

Big backlit FSTN LCD display, the weight can be read clearly even in the sun. SUS304 s.s IP66 housing, suitable for harsh environment, with rechargeable battery, 100-240V power source directly, kg/lb unit exchange, animal weighing function, accumulating, hold, x10 accuracy, counting, zero, tare, printing, etc. Default with 2 RS232 connector, options of Bluetooth or WiFi.



Indicator X3WGM optional

OIML/EC Type approved.

Rechargeable battery, Programming zero tracking,

Kg/lb units, counting function, animal weighing,

Hold function, accumulation, RS232 interface



### Accessories

ISB | MDSS

### Models \* Prices not include indicators

Part No.	100453	100454	100455	100456	100457	100458
Models1	FWR1010	FWR1020	FWR1210	FWR1220	FWR1510	FWR1520
<b>U.P.(USD)</b>	<b>\$2,840.00</b>	<b>\$2,840.00</b>	<b>\$3,120.00</b>	<b>\$3,120.00</b>	<b>\$4,240.00</b>	<b>\$4,240.00</b>
Part No.	100459	100460	100461	100462	100463	100464
Models2	FWR1010M	FWR1020M	FWR1215M	FWR1230M	FWR1515M	FWR1530M
<b>U.P.(USD)</b>	<b>\$3,400.00</b>	<b>\$3,400.00</b>	<b>\$3,680.00</b>	<b>\$3,680.00</b>	<b>\$4,800.00</b>	<b>\$4,800.00</b>
Capacity	1000kg	2000kg	1000kg	2000kg	1000kg	2000kg
Division	0.2   0.5kg	0.5   1kg	0.2   0.5kg	0.5   1kg	0.2   0.5kg	0.5   1kg
Size	800 x 1000mm		1000 x 1200mm		1200 x 1500mm	
Weight	80kg		95kg		160kg	

#### Platform Sizes

1000 x 1000mm  
1200 x 1200mm  
1500 x 1500mm

#### Capacity

1000kg | 2000kg

#### Division

0.2kg | 0.5kg | 1.0kg

#### Load Cell Approval

M28s - CE  
BM8D - OIML/NTEP

#### Load Cell Protection

IP67 | IP68

#### Operating Temperature

-10 - 40°C

#### Power

100-240V AC/DC adaptor  
Battery: 6V1.2Ah - K7s  
Battery: 6V2.8Ah - X3WGM

#### Indicator & Protection

K7s - CE - IP66  
X3WGM - OIML/EC Type - IP66

#### Display

37mm FSTN LCD - K7s  
20mm green LED - X3GM

#### Unit

Kg | lb, g | oz, t - K7s  
Kg | lb - X3GM

#### Output

RS232 \* 2 - K7s  
RS232 - X3GM