

Steel or S.S Platform


KPC4200 with steel tube structure
 KPC4200s with stainless steel structure
 Stainless steel cover
 Stainless steel pole
 Overloading protecting

M15 | M15F Load Cell

High quality with IP65 protection
 KPC4200s with IP66 shield

X1PC | X5PC Indicator

Big backlit LCD display
 X1PC with ABS housing
 X5PC with stainless steel housing
 With rechargeable 6V4Ah/6V2.8Ah battery
 100-240v power adaptor
 kg/lb units exchange
 28 memories PLU
 Zero, tare, accumulating function
 RS232 interface for printer or PC
 Programmable shop info
 Option of Bluetooth output
 Optional adjustable pole supporter

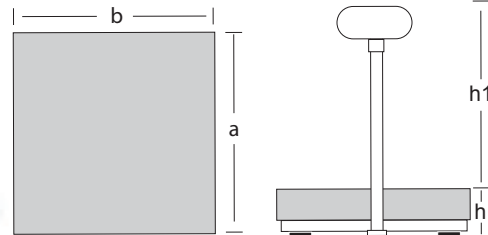

dimension: mm

Models	a	b	h	h1
KPC4200	500	400	125	615
KPC4200s	500	400	125	615

Power
 100-240V 50/60Hz
 Battery: 6V4Ah/6V2.8Ah
 Estimated Battery Life: 30 hours
 Charge Time: 8 Hours

Display
 LCD with backlight

Units
 Kg | lb

Display Resolution
 1/3,000 - 1/10,000

Output
 RS232
 optional Bluetooth
 optional WiFi

Platform Sizes
 400 x 500mm
 * other size customized

Operating Temperature
 -10°C - 40°C

Capacity
 200kg

Approval
 CE

Load Cells
 M15 | M15F - IP65

Models

Part No.	100123	100124
Models	KPC4200	KPC4200s
U.P.(USD)	\$276.00	\$664.00
Capacity	200kg	200kg
Division	50g	50g
Size	400 x 500mm	
Weight	17kg	